


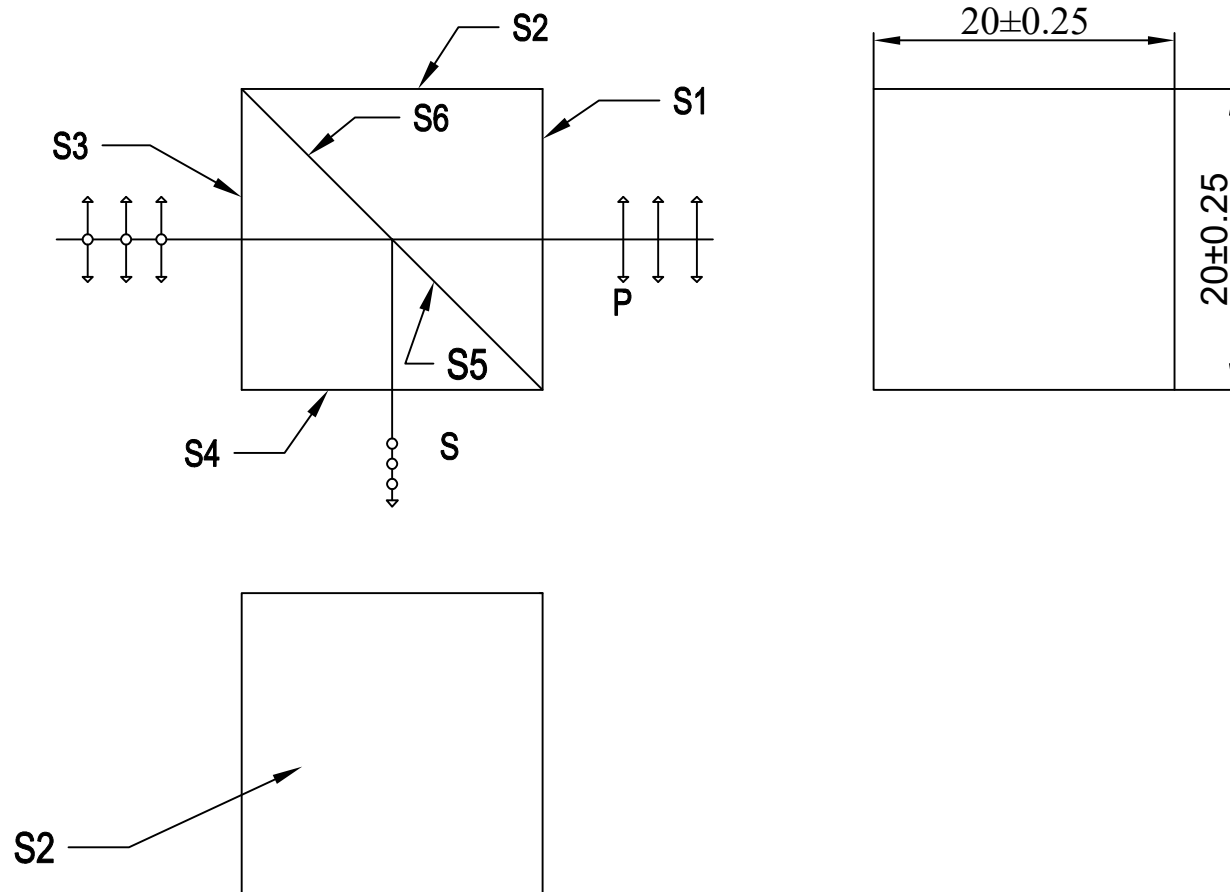

#### NOTES:

- 1.CLEAR APERTURE: >85%CA
- 2.AR COATING(S1,S2,S3,S4):  
RAVG<0.5% @266 nm(0°AOI,MULTI SURFACE)
- 3.DIAMETER TOLERANCE:  $\pm 0.2$  mm
- 4.ANGLE TOLERANCE:  $\pm 30''$
- 5.COATING(S5):  $T_p > 97\%$ ,  $R_s > 97\%$  @266 nm(45°AOI)
- 6.GLUED(S5,S6): NOA61
- 7.EXTINCTION RATIO( $T_p$ :  $T_s$ ): 200: 1
- 8.TRANSMITTED BEAM DEVIATION:  $0 \pm 1'$
- 9.REFLECTED BEAM DEVIATION:  $90 \pm 1'$
- 10.SURFACE QUALITY(S1,S2,S3,S4): 20/10(S/D)
- 11.WAVEFRONT ERROR(RMS):  $\lambda/4$  @633 nm
- 12.SURFACE FLATNESS(S1,S2,S3,S4):  $\lambda/4$  @633 nm
- 13.OTHER SURFACES: FINE GROUND
- 14.CHAMFER:  $0.5 \pm 0.1 \times 45^\circ$

MULTI-LAYER DIELECTRIC-COATED  
PLATE MIRROR

OP-P-BSHP-20-20/10-266

MLOPTIC | 茂莱

ISSUE SCALE PAGE FIRST ANGLE

A0

1:1

1 OF 1

