
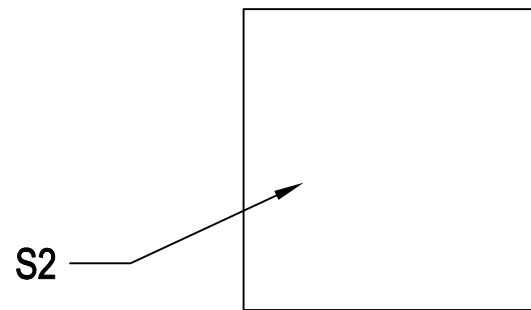
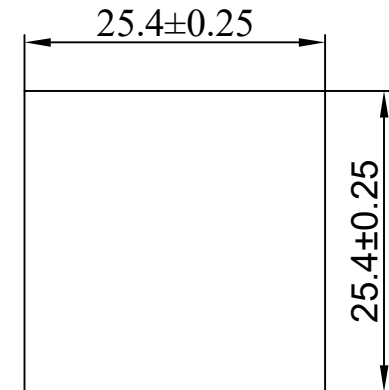


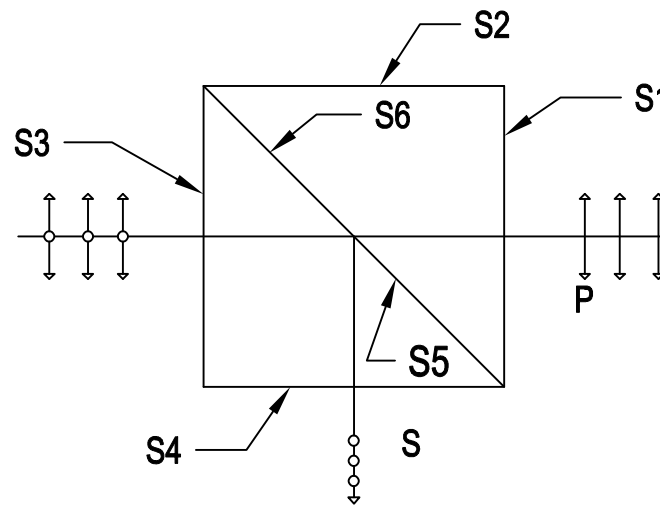

NOTES:

1.CLEAR APERTURE: >85%CA

2.AR COATING(S1,S2,S3,S4):

RAVG<0.5% @1030 nm(0°AOI,MULTI SURFACE)

3.DIAMETER TOLERANCE: ±0.2 mm

4.ANGLE TOLERANCE: ±30"

5.COATING(S5): Tp>97%,Rs>97%@1030 nm(45°AOI)

6.GLUED(S5,S6): NOA61

7.EXTINCTION RATIO(Tp: Ts): 200: 1

8.TRANSMITTED BEAM DEVIATION: 0±1'

9.REFLECTED BEAM DEVIATION: 90±1'

10.SURFACE QUALITY(S1,S2,S3,S4): 40/20(S/D)

11.WAVEFRONT ERROR(RMS): λ/4@633 nm

12.SURFACE FLATNESS(S1,S2,S3,S4): λ/4@633 nm

13.OTHER SURFACES: FINE GROUND

14.CHAMFER: 0.5±0.1X45°

MULTI-LAYER DIELECTRIC-COATED
PLATE MIRROR

MLOPTIC | 茂莱

OP-P-BSHP-25.4-40/20-1030

ISSUE	SCALE	PAGE	FIRST ANGLE
A0	1:1	1 OF 1	