
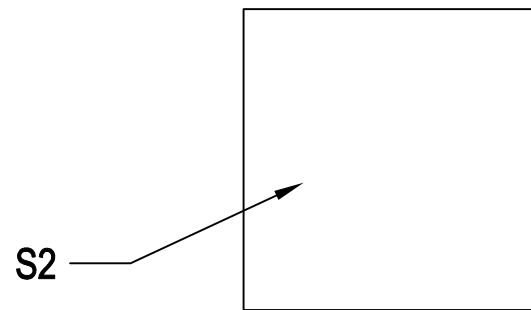
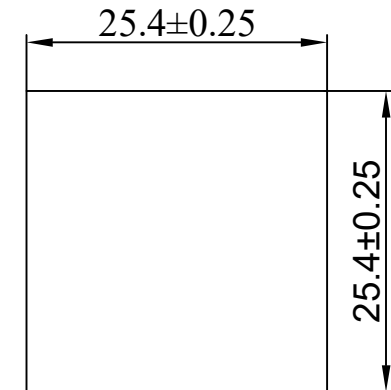


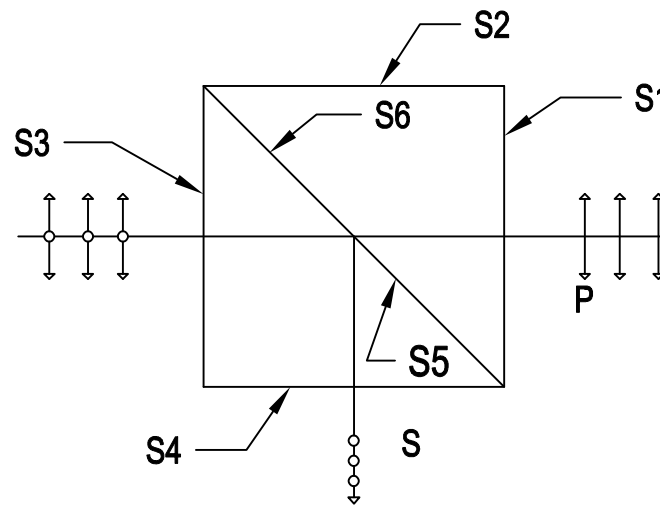

NOTES:

- 1.CLEAR APERTURE: $>85\%CA$
- 2.AR COATING(S1,S2,S3,S4):
RAVG<0.5% @1064 nm(0°AOI,MULTI SURFACE)
- 3.DIAMETER TOLERANCE: ± 0.2 mm
- 4.ANGLE TOLERANCE: $\pm 30''$
- 5.COATING(S5): $T_p > 97\%, R_s > 97\%$ @1064 nm(45°AOI)
- 6.GLUED(S5,S6): NOA61
- 7.EXTINCTION RATIO($T_p: T_s$): 200: 1
- 8.TRANSMITTED BEAM DEVIATION: $0 \pm 1'$
- 9.REFLECTED BEAM DEVIATION: $90 \pm 1'$
- 10.SURFACE QUALITY(S1,S2,S3,S4): 40/20(S/D)
- 11.WAVEFRONT ERROR(RMS): $\lambda/4$ @633 nm
- 12.SURFACE FLATNESS(S1,S2,S3,S4): $\lambda/4$ @633 nm
- 13.OTHER SURFACES: FINE GROUND
- 14.CHAMFER: $0.5 \pm 0.1 \times 45^\circ$

MULTI-LAYER DIELECTRIC-COATED
PLATE MIRROR

OP-P-BSHP-25.4-40/20-1064

MLOPTIC | 茂莱

ISSUE	SCALE	PAGE	FIRST ANGLE
A0	1:1	1 OF 1	