
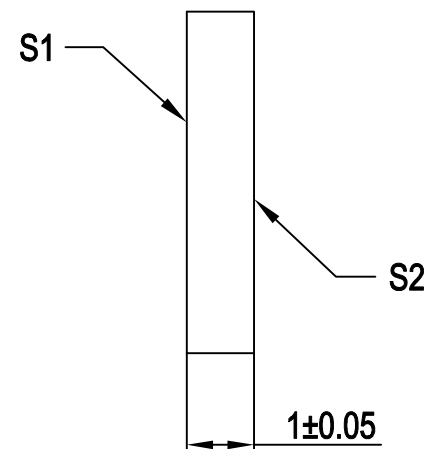


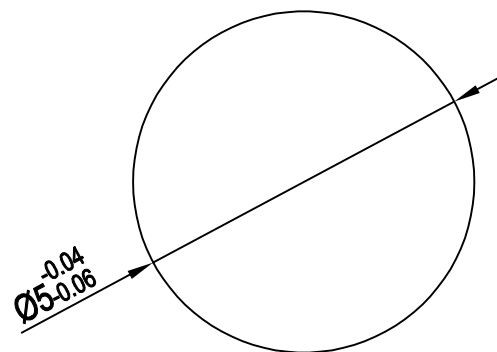

NOTES:

1. MATERAIL: JB490
2. COATING (S1,S2) : $T > 85\% @ 890 \sim 915 \text{ nm}$
3. FWHM: $45 \pm 5 \text{ nm}$, BLOCKING REGIONS:
 $T_{\text{max}} < 0.8\% @ 300 \sim 840 \text{ nm}$, $T_{\text{avg}} < 0.1\% @ 970 \sim 1200 \text{ nm}$
4. SURFACE QUALITY: 2×0.4 (S/D)
5. SURFACE FLATNESS (S1,S2) : $1\lambda @ 633 \text{ nm}$
6. CLEAR APERTURE: $\text{Ø}3.5$ (CA)
7. PARALLELISM (S1,S2) : $30''$
8. CHAMFER: $0.1_{+0.1}^{+0.1} \times 45^\circ$

OPTICAL FILTER		MLOPTIC 茂莱			
货号	ISSUE	SCALE	PAGE	FIRST ANGLE	
	A0	1:1	1 OF 1		